

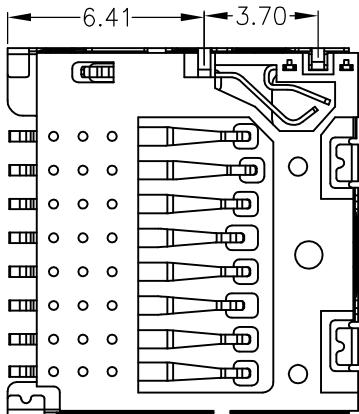
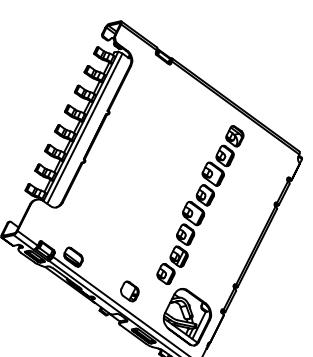


<i>Card insertion Condition</i>	<i>Card detect switch</i>	<i>Circuit</i>
<i>Without Card</i>	<i>Open</i>	

庄子原刻本
牛玄制印 中韓文繁體印 DONG西書

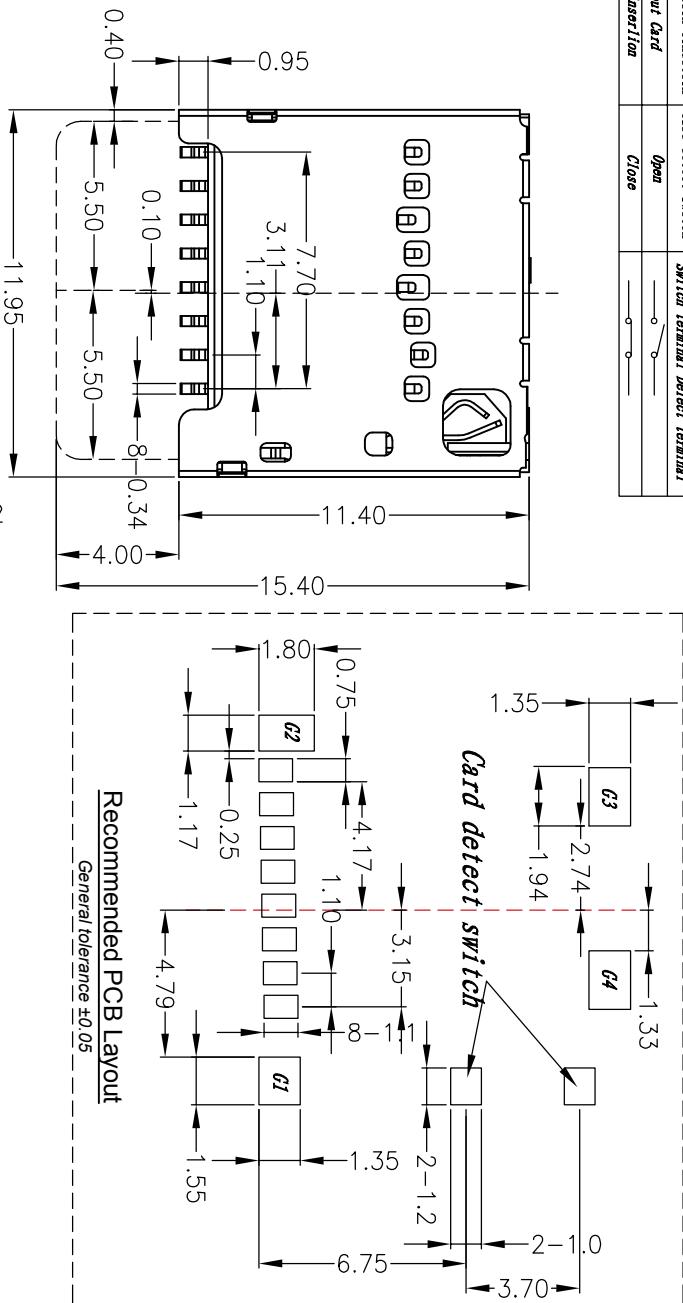

PIN NO.	PIN ASSIGNMENT		
P1		DAT2	信号
P2	C/D	DAT3	信号
P3	CMD		数据输出
P4	VDD		电源电压
P5	CLK		时钟
P6	VSS		接地
P7	DAT0		信号
P8	DAT1		信号

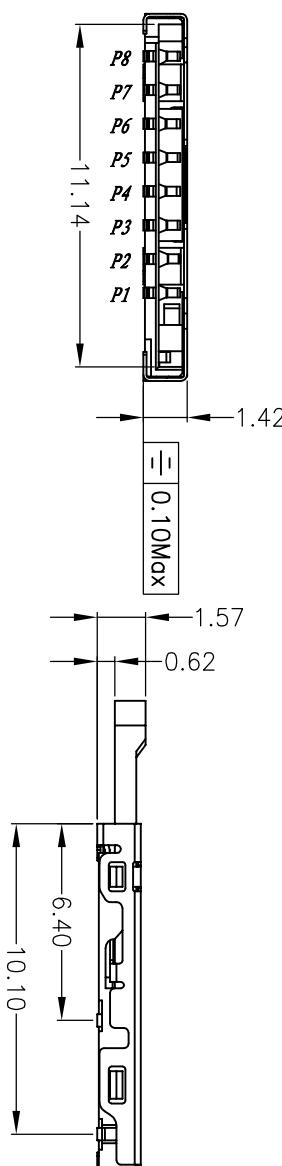

Electrical:

Contact: Ni Al1 50u", Contact area 1u Au", Pad0.8u Au"

Shell: Ni Al 50u", Pad Au

Current Rating: 0 FMA AC/DC max

Voltage Rating : 125V AC/DC

Ambient Temperature Range : -25° C to +85° C
Storage Temperature Range : -25° C to +85° C

Ambient Humidity Range :95% R.H. Max.

Contact Resistance: 100m **max.**
Insulation Resistance: 1000MΩmin. / 500VDC

Mating Cycles:5,000 Insertions 産卵耐温温度. 260°

八 哈哈幽默：200

深圳市鑫南天科技有限公司

en zhen Shi Xin Nan Tian Industrial Co., Ltd

Micro sd no push 1.42fl 带开关-常开型
COCO
2020/04/10

5